



AMENTIS

THE LIGHTING PEOPLE





COMPANY INTRODUCTION

Amentis is registered brand through which we deliver medium and higher range products in domestic market.

After 12 years of endeavors, the group has undergone continuous development and expansion for providing better lighting for the customers. Our group owes its success to reliable quality, reasonable price & excellent marketing skills which made us in possession of many stable clients.

We as a manufacturing company specialization in lighting & lighting fixture products has constantly looked forward in cutting edge products and advanced technologies in the market and has made efforts to provide customers with added value through its business activities in good faith.

Taking best solutions as our starting point, we are constantly involved in the development of daring and positive business activities.

It is our aim to continue to provide our customers with the very best in cutting-edge solutions. We will continue to grow as a top-class specialized-technology manufacturing company that provides top class products incorporating the most innovative technology expertise and information with excellent coordination skills and global-support systems.



Aluminium Die-cast material
 Indoor Recess Lighting
 Cree Cob Branded Led Used CRI>80; 140LM/W
 Beam Angle 25-45 Degree
 Used For Focussed Lighting
 Premium Reflectors Used For Optimum Output
 Constant Current Driver
 Color: wh/ww/nwh



SONEE COB SPOTLIGHT

REAR VIEW

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALSN7R	7	85	65	54	24
ALSN10R	10	85	65	54	24
ALSN15R	15	85	65	75	24-40
ALSN24R	24	110	90	110	45



REAR VIEW



SOLIS COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALSO7R	7	76	65	50	24
ALSO10R	10	76	65	50	24
ALSO15R	15	76	65	70	24-40
ALSO24R	24	110	90	100	45

Aluminium Die-cast material
 Indoor Recess Lighting
 Cree Cob Branded Led Used CRI>80; 140LM/W
 Beam Angle 25-45 Degree
 Used For Focussed Lighting
 Premium Reflectors Used For Optimum Output
 Constant Current Driver
 Color: wh/ww/nwh





GOLDEN REFLECTOR



COPPER REFLECTOR



CHROME REFLECTOR



REAR VIEW



OREO COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALORE10R	10	80	70	45	60
ALORE15R	15	100	85	55	60

Aluminium Die Cast

Indoor Recess Lighting

Cree Cob Branded Led Used Cri>80 ; 140lm/w

Used For Focussed Lighting

Premium High Grade Reflectors Used

Constant Current Driver

Models available : Wh + Gold, Wh + Copper, Wh + Chrome

Bk + Gold, Bk + Copper, Bk + Chrome



TOP VIEW



REAR VIEW

Aluminium Die Cast
 Indoor Recess Lighting
 Cree Cob Branded Led Used Cri>80 ; 140 Lm/W
 Used For Focussed Lighting
 Premium High Grade Reflectors Used
 Constant Current Driver
 Powder Coating Available : WHITE & BLACK



ORO COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALORO10R	10	80	70	45	60
ALORO15R	15	100	85	55	60
ALORO20R	20	110	100	55	60



REAR VIEW



DEEP COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALDE12R	12	85	75	85	36

Aluminium Die Cast
 Indoor Recess Lighting
 Cree Cob Branded Led Used Cri>80 ; 140 Lm/W
 Used For Focussed Lighting
 Premium High Grade Reflectors Used
 Constant Current Driver





REAR VIEW

Aluminium Die Cast
Indoor Recessed Lighting
Cree COB Branded LED Used CRI>80; 140 Lm/W
Used For Focused Lighting
Premium High Grade Reflectors Used
Constant Current Driver



GUSH COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALGU7R	7	70	60	65	36
ALGU12R	12	85	75	65	36



TOP VIEW



REAR VIEW



FLAVA COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALFL7R	7	60	52	65	36
ALFL12R	12	85	75	80	36

Aluminium Die-cast material
Indoor Recess Lighting
Cree Cob Branded Led Used CRI>80; 140LM/W
Used For Focussed Lighting
Premium High Grade Reflectors Used
Constant Current Driver
Copper Finish Also Available





REAR VIEW

Aluminium Die Cast
 Indoor Recessed Lighting
 New Rimless Design
 Cree COB Branded LED Used CRI>80; 140 LM/W
 Used For Focused Lighting
 Premium High Grade Reflectors Used
 Constant Current Driver



LIBRA COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALLB7R	7	60	52	60	36
ALLB12R	12	85	75	75	36



REAR VIEW



SONA COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALSON7R	7	70	60	65	36
ALSON12R	12	105	95	95	36

Aluminium Die Cast
 Indoor Recessed Lighting
 Cree COB Branded LED Used CRI>80; 140 Lm/W
 Used For Focused Lighting
 Premium High Grade Reflectors Used
 Constant Current Driver





REAR VIEW

GLINT COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALGN2R	12	70	62	85	36
ALSN12S	12	70	62	85	36

Aluminium Die Cast
 Indoor Recessed Lighting
 Cree COB Branded LED Used CRI>80; 140 Lm/W
 Used For Focused Lighting
 Premium High Grade Reflectors Used
 Constant Current Driver





GLAZE LED COB SURFACE

MODEL	WATT	OUTER	HEIGHT	BEAM ANGLE
ALGZ7R	7	80	110	44
ALGZ12R	12	80	150	44
ALGZ18R	18	80	150	44

Aluminium Die-cast material
 Surface Mount Fixtures
 Branded LED Used CRI>80; 140 Lm/W
 Used For Focused Lighting
 Premium High Grade Reflectors used
 Constant Current Driver



LINEA SPOT LIGHT


MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALLN5S	5	74 X 44	65 X 35	40
ALLN125	12	146 X 44	137 X 35	40
ALLN245	24	281 X 44	271 X 35	40

- Aluminium Die Cast
- Indoor Recessed Lighting
- Branded LED Used
- Used For Focused Lighting
- Premium High Grade Reflectors Used
- Constant Current Driver
- Powder Coating Available : WHITE & BLACK
- Reflectors Available : WHITE & BLACK


SAMSUNG LED



SIDE VIEW

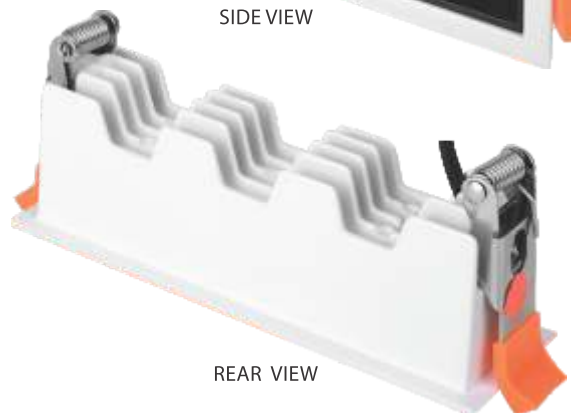

REAR VIEW

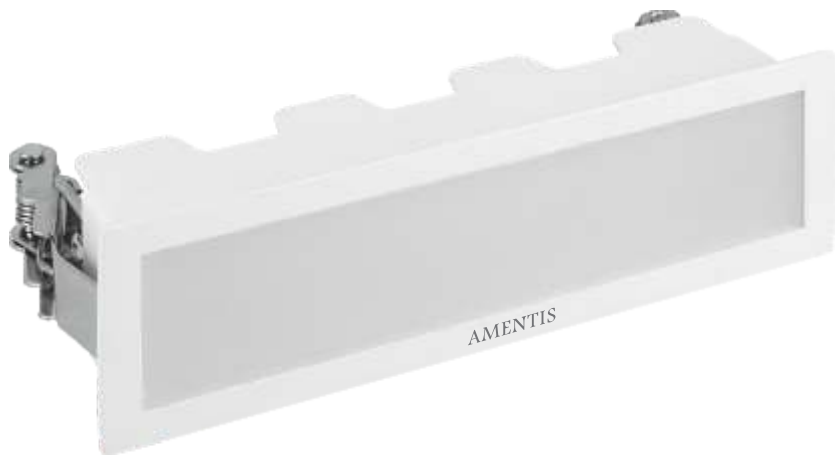

Aluminium Die Cast
Indoor Recessed Lighting
Branded LED Used
Premium High Transparency Diffuser Used
Constant Current Driver

LINEA DIFFUSED

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALLN12DIF	12	146 X 44	137 X 35	40
ALLN20DIF	20	281 X 44	271 X 35	40



LED LINEA WALL WASHER

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALLNWW12	12	146 X 44	137 X 35	40

Used For Highlighting Particular Area
Indoor Recessed Lighting
Branded LED Used
Used For Focused Lighting
Premium High Grade Reflectors Used
Constant Current Driver



Aluminium Die Cast
 Give CCT Ranging From 3000K To 6500K
 Indoor Recess Lighting
 Branded LED used
 Constant Current Driver
Also Can Be Used As Dimmable With Remote

LINEA DIMMABLE 3CCT

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALLN12DIM	12	146 X 44	137 X 35	40
ALLN20DIM	20	281 X 444	271 X 35	40



TOP VIEW



REAR VIEW



OREO DIMMABLE 3CCT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALORO15DIM	15	100	85	55	60

Aluminium Die Cast
 Give CCT Ranging From 3000K To 6500K
 Indoor Recess Lighting
 Branded LED used
 Constant Current Driver
Also Can Be Used As Dimmable With Remote



REAR VIEW




REAR VIEW

LED BOX WALL LIGHT

MODEL	WATT	LENGTH	WIDTH	HEIGHT
ALBX6	6	110	80	100
ALBX12	12	190	80	100
ALBX24	24	310	80	100
ALBX30	30	460	80	100

Aluminium Material Used
 Used As Aesthetic Lighting
 Branded Led Used
 Constant Current Driver

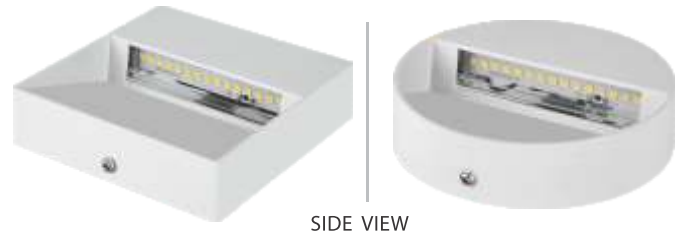

SIDE VIEW

New Slim Concept Design
 Material Made Of PC
 Used For Outdoor Application
 Constant Current Driver
 Used as Outdoor Application Ex. Path ways

PC WALL LIGHT - CORE

MODEL	WATT	LENGTH	WIDTH	HEIGHT
ALCO2R	2	115	28	27
ALCO2S	2	110	28	27




FOOT LIGHT - STEP

MODEL	WATT	LENGTH	WIDTH	HEIGHT
ALFL2	2	90	72	45
ALFL4	4	150	72	45

LED Outdoor Wall Light
 Aluminium Die Cast
 Used For Outdoor Application
 Constant Current Driver




2006X

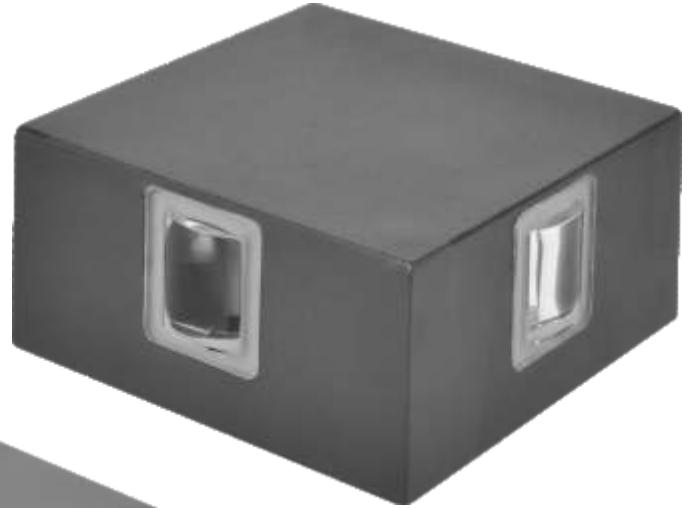

2012X



2012

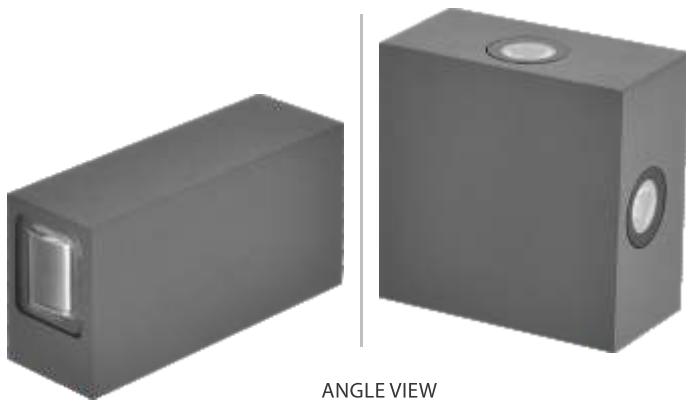

ANGLE VIEW

Led Outdoor Wall Light
Aluminium Die Cast
Used For Outdoor Application As Wall Washer
Constant Current Driver

2 WAY OUTDOOR

MODEL	WATT	LENGTH	WIDTH	HEIGHT
2006X	6	117	60	40

4 WAY OUTDOOR

MODEL	WATT	LENGTH	WIDTH	HEIGHT
2012	12	98	98	50
2012X	12	98	98	50



REAR VIEW

Aluminium Die-cast material
 Indoor Recess Lighting
 Everlight Branded LED used CRI>80 ; 140 Lm/W
 New Rimless design
 Premium High Transparency Diffuser used
 Constant Current Driver
 Color: wh/ww/nwh

OBY LED DOWNLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALOB9R	9	120	110	50
ALOB16R	16	150	125	55
ALOB24R	24	175	150	55



REAR VIEW



BLAZE WALL LIGHT

MODEL	WATT	LENGTH	WIDTH	HEIGHT
ALBL24	24	295	50	120

Aluminium Die-cast material
 Used As Aesthetic Lighting
 Branded LED Used
 Constant Current Driver



REAR VIEW



TOP VIEW

Aluminium Die-cast material
 Indoor Recess Lighting
 Everlight Branded LED used CRI>80 ; 140 Lm/W
 Premium High Transparency Diffuser used
 Constant Current Driver
 Color: wh/ww/nwh

AMOR DOWNLIGHT LED

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALAM12R	12	150	135	55
ALAM18R	18	150	135	55
ALAM24R	24	200	185	55
ALAM30R	30	200	185	55



REAR VIEW



AMOR COB DOWNLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALAC18R	18	150	135	55	80
ALAC28R	28	200	185	55	80



Aluminium Die-cast material
 Indoor Recess Lighting
 Premium High Grade Aluminium Reflector
 Cree Cob Branded Led Used CRI>80; 140 Lm/W
 Beam Angle 80 Degree
 Premium High Transparency Diffuser used
 Constant Current Driver
 Color: wh/ww/nwh



TOP VIEW

Aluminium Die-cast material
 Indoor Surface lighting
 New slim height surface
 Everlight Branded LED used CRI>80 ; 140-150 Lm/W
 Premium High Transmission PMMA(Igp)>94%
 Premium High Transparency Diffuser used
 Constant Current Driver
 Color: wh/ww/nwh

NOVA PRO ROUND LED SURFACE

MODEL	WATT	OUTER	HEIGHT
ALNP9R	9	105	35
ALNP15R	15	140	35
ALNP18R	18	160	35
ALNP24R	24	200	35



TOP VIEW

NOVA PRO SQUARE LED SURFACE


MODEL	WATT	OUTER	HEIGHT
ALNP9S	9	105	35
ALNP15S	15	140	35
ALNP18S	18	160	35
ALNP24S	24	200	35



Aluminium Die-cast material
 Indoor Surface lighting
 New slim height surface
 Everlight Branded LED used CRI>80 ; 140-150 Lm/W
 Premium High Transmission PMMA(Igp)>94%
 Premium High Transparency Diffuser used
 Constant Current Driver
 Color: wh/ww/nwh



REAR VIEW

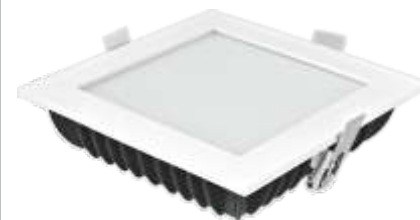

TOP VIEW

Aluminium Die-cast material
 Indoor Recess Lighting
 Everlight Branded LED used CRI>80 ; 140 Lm/W
 Premium High Transparency Diffuser used
 Constant Current Driver
 Color: wh/ww/nwh

LED DOWNLIGHT POLO

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALPO12S	12	135	120	40
ALPO18S	18	160	145	40
ALPO24S	24	195	175	50
ALPO30S	30	195	175	50



TOP VIEW

NOVA CURVO - LED SURFACE

MODEL	WATT	OUTER	HEIGHT
ALNC9S	9	120	35
ALNC15S	15	155	35
ALNC18S	18	175	35
ALNC24S	24	215	35



Aluminium Die-cast material
 Indoor Surface lighting
 New slim surface with great curve model
 Premium High Transmission PMMA(lgp)>94%
 Everlight Branded LED used CRI>80 ; 140-150 Lm/W
 Premium High Transparency Diffuser used
 Constant Current Driver
 Color: wh/ww/nwh



Aluminium Die-cast material
 Indoor Recess Lighting
 Everlight Branded LED used CRI>80 ; 140 Lm/W
 Premium High Transparency Diffuser used
 Constant Current Driver
 Color: wh/ww/nwh



REAR VIEW



TOP VIEW

ORUS SLIM DOWN LIGHT - ROUND

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALOR9R	9	110	97	39
ALOR16R	16	140	130	39
ALOR22R	22	175	163	39
ALOR40R	40	250	240	39



REAR VIEW




TOP VIEW

ORUS SLIM DOWN LIGHT - SQUARE

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALOR9S	9	110	97	40
ALOR16S	16	140	130	40
ALOR24S	24	175	163	40
ALOR40S	40	250	240	40



Aluminium Die-cast material
 Indoor Recess Lighting
 Everlight Branded LED used CRI>80 ; 140 Lm/W
 Premium High Transparency Diffuser used
 Constant Current Driver
 Color: wh/ww/nwh

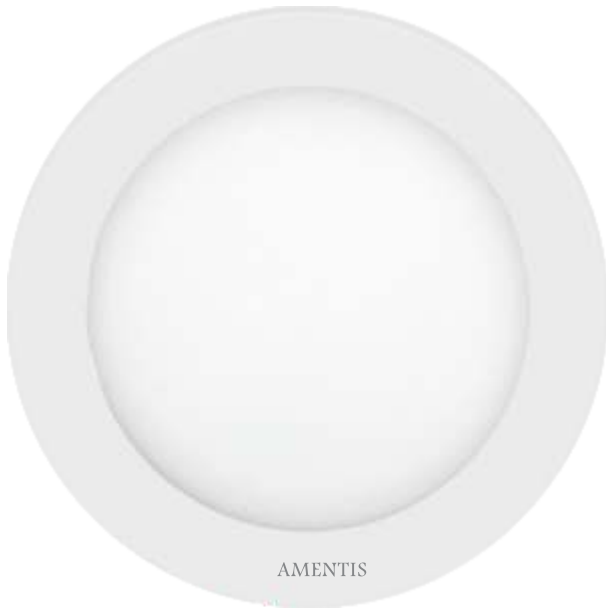

REAR VIEW



TOP VIEW

SLIM PANEL NOVA ROUND

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALNO4R	4	90	78	20
ALNO9R	9	120	105	20
ALNO15R-A	15	150	135	20
ALNO15R-B	15	165	150	20
ALNO18R	18	185	173	20
ALNO24R	24	220	205	20

Aluminium Die-cast material
 Indoor Recess Lighting
 Everlight Branded LED used CRI>80 ; 140-150 Lm/W
 Premium High Transmission PMMA(lgp)>94%
 Premium High Transparency Diffuser used
 Constant Current Driver
 Color: wh/ww/nwh



REAR VIEW



TOP VIEW

SLIM PANEL NOVA SQUARE

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALNO9S	9	120	105	20
ALNO15S-A	15	150	135	20
ALNO15S-B	15	165	150	20
ALNO18S	18	185	173	20
ALNO24S	24	220	205	20



AMENTIS

Aluminium Die-cast material
 Indoor Recess Lighting
 Everlight Branded LED used CRI>80 ; 140-150 Lm/W
 Premium High Transmission PMMA(lgp)>94%
 Premium High Transparency Diffuser used
 Constant Current Driver
 Color: wh/ww/nwh

36 WATT RECTANGLE PANEL

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALNO136	36	515 X 156	494 X 132	23



LED STREET LIGHT

MODEL	WATT	LENGTH	WIDTH	HEIGHT
ALSL18	18	380	100	50
ALSL24	24	380	100	50
ALSL24B	24	380	140	50
ALSL30	30	380	140	50
ALSL36	36	380	140	50
ALSL50	50	390	170	55

Aluminium Die-cast material
 Professional Design For Maximising Light Output
 Everlight Branded LED used CRI>80 ; 140 Lm/W
 Fixtures With Inbuilt Drivers
 Used For Illuminating Parking Area And Roadside
 High Efficiency Driver Used Eff:>88%



CAPSULE LED STREET LIGHT

MODEL	WATT	LENGTH	WIDTH	HEIGHT
ALCS32	32	310	90	65

Aluminium Die-cast material
 Professional Design For Maximising Light Output
 Everlight Branded LED used CRI>80 ; 140 Lm/W
 Fixtures With Inbuilt Drivers
 Used For Illuminating Parking Area And Roadside
 High Efficiency Driver Used Eff:>88%



LED FLOOD LIGHT

MODEL	WATT	LENGTH	WIDTH	HEIGHT
ALFL15	15	100	130	75
ALFL30	30	150	210	105
ALFL50	50	185	270	115
ALFL100	100	235	345	135
ALFL150	150	300	400	150
ALFL200	200	345	500	140

Aluminium Die-cast material
 New Slim Design Concept
 Professional Design For Maximising Light Output
 Everlight Branded LED used CRI>80 ; 140 Lm/W
 Fixtures With Inbuilt Drivers
 Used For Illuminating Boards And Parking Lot
 High Efficiency Driver Used Eff:>88%



THE LIGHTING PEOPLE



Disclaimer : Product and accessories shown in this catalog may change due to continuous research and development.
Company may change or alter any model without prior notice.